
NOTES:
1. Material: S-LAH64;
2. Design wavelength: 780 nm;
3. Focal length: F=+10 mm ± 0.05%;
4. Centration error: ≤ 3 arcmin;
5. G - Fine ground surface;
6. All dimensions are in mm;
7. Clear aperture: ≥90%;


	R	k	A_4	A_6	A_8	A_{10}
S1	7.77	-0.54	-2.38015E-05	-5.34418E-07	-4.62023E-09	-2.26684E-11
S2	Infinity	-	-	-	-	-

$$z = \frac{Y^2}{R(1+\sqrt{1-(1+k)Y^2/R^2}} + A_4Y^4 + A_6Y^6 + A_8Y^8 + A_{10}Y^{10}$$



Isometric view 1:1

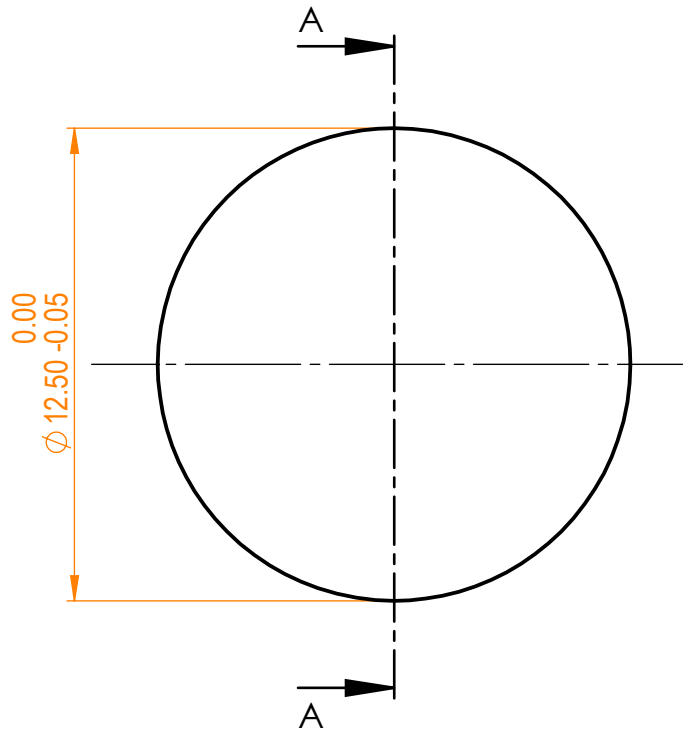

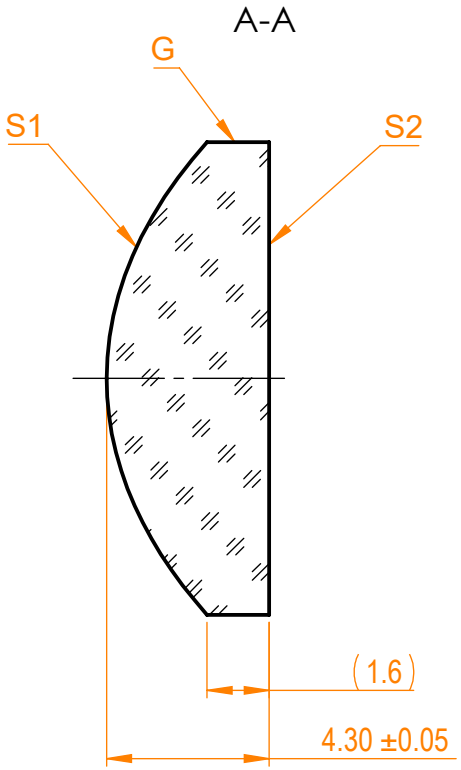

Specifications are subject to change without notice
Dimensions are for reference only

Parameters		
	S1	S2
Shape	Convex	Plano
Surface quality	40-20 s/d	40-20 s/d
Surface irregularity	-	λ/4 @632.8 nm
Asphere figure error P-V	±1 μm	-
Surface form deviation RMS	≤0.5 μm	-
Protective chamfers	0.2 - 0.3 mm x 45°	0.2 - 0.3 mm x 45°

Eksma Optics
info@eksmaoptics.com
www.eksmaoptics.com

S-LAH64 pl/cx aspheric lens,
D=12.5 mm, F=10 mm

Proprietary		Name	Date	Part number	Rev.	Scale
The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited.	Approved	A.K.	2020.03.18	116-1210	A	5:1
	Drawn	M.B.	2020.03.18			