


NOTES:
1. Material: N-BK7;
2. G - Fine ground surface;
3. All dimensions are in mm;
4. Protective chamfers: 0.3 mm x 45°;
5. Parallelism: <10 arcsec;
6. Transmission: 100% of p-polarization @1064nm;
7. Reflection: 26% of s-polarization @1064nm.



Isometric view 1:4

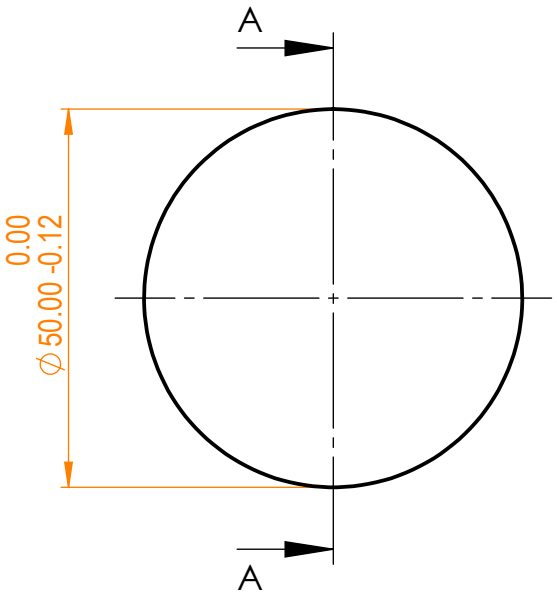


A-A

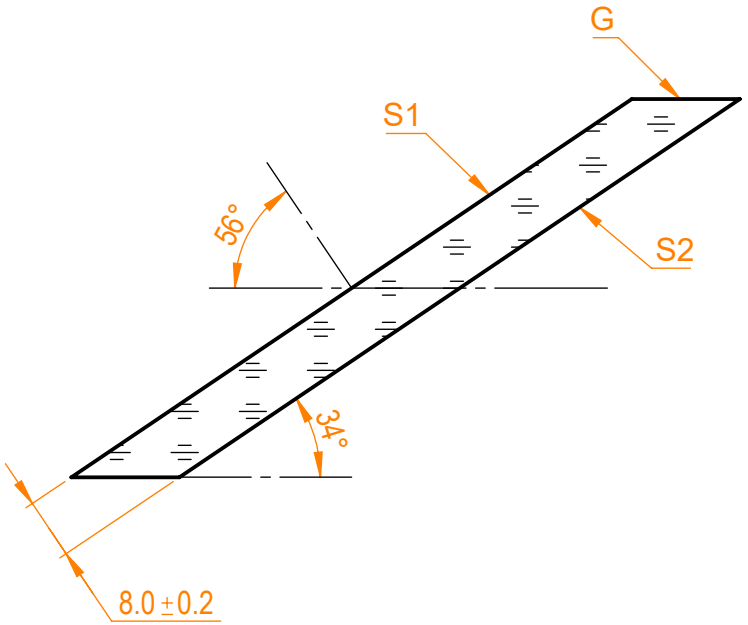


Specifications are subject to change without notice
Dimensions are for reference only

| Parameters | | |
|---|---|---|
| | S1 | S2 |
| Shape | Plano | Plano |
| Surface flatness | λ/10 @633nm | λ/10 @633nm |
| Surface quality | 20-10 s/d | 20-10 s/d |
| Clear aperture | >90% | >90% |
| Coating | - | - |

Eksma Optics
info@eksmaoptics.com
www.eksmaoptics.com

Brewster window, D=50 mm, T=8 mm

Proprietary
The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited.

| | Name | Date | Part number | Rev. | Scale |
|---|---|---|---|---|---|
| Approved | A.K. | 2020.12.10 | 410-0508 | A | 1:1 |
| Drawn | V.S. | 2020.12.10 | | | |