
D-mini/9-1064 DKDP (KD*P) Pockels cell
Clear aperture: diameter 8.0 mm
Quarter wave voltage at 1064 nm: < 3.4 kV DC
Capacitance: < 6 pF
Optical transmission: > 97 % at 1064 nm
Contrast ratio in crossed polarizers (ICR): > 1:2000 (no voltage is applied)
Damage threshold of dielectric AR coatings: > 0.5 GW/cm2 (> 5 J/cm2), 1064 nm, 10 Hz, 10 ns
With protective windows on both ends
Cell size: diameter 19 mm x 25.4 mm (L)




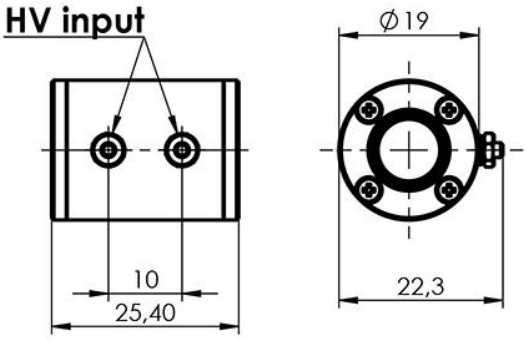

Outline picture and drawing of **D-mini/9** DKDP (KD*P) Pockels cell

The specifications are subject to change without any notice in advance.

EKSMA Optics, UAB
Mokslininku St. 11,
LT-08412 Vilnius, Lithuania
Tel. +370 5 272 9900
Fax +370 5 272 9299
info@eksmaoptics.com
www.eksmaoptics.com
Company code 300624547
VAT ID LT100002802516

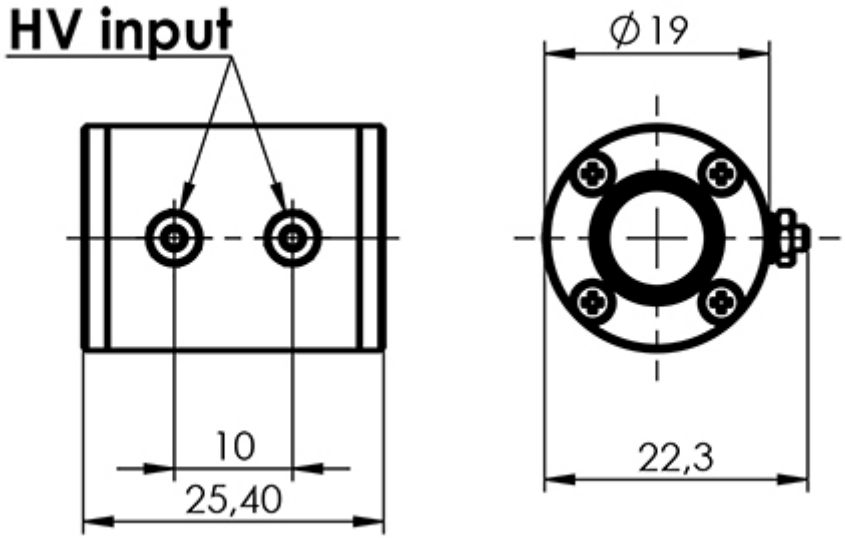
HV input
Ø 19
10
25,40
22,3